Compiled/Updated	LL
Approved	CD
Issued Date	22-7-26
Amendment	A4

Product Data Sheet – Rubber Insulating Sleeves

PPE for Linesman and Electrical Contractors during live work.

Key Features:

- **Most comprehensive range of sizes** on the market including difficult to get XS and XL.
- **Yotsugi are known for being the softest and most supple** rubber sleeves available with a 15% softer shore hardness rating than alternatives in the market.
- **Glove & Barrier Work** These sleeves are designed to shield arms from accidental contact with energised conductors and equipment.




Figure 1 Example of Yotsugi sleeve label (excludes size XS)



Figure 2 Sleeve accessories available

Dimensions Table (B)

Item No	Size	A	B	C	D
RIS4RYECXS-YT & RIS4RYECXS-YT-V3	Extra small	533	296	290	150
*RIS4RYECS-YT-V3	Small	616	384	317	146
*RIS4RYECR-YT-V3	Regular	673	394	311	146
*RIS4RYECL-YT-V3	Large	705	406	327	175
*RIS4RYECXL-YT-V3	Extra large	749	445	327	178

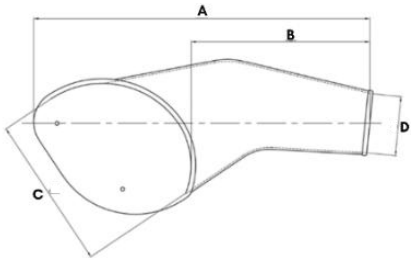

Note: Dimensions for items marked with a * are drawn from Table 4 in ASTM D1051. There is no provision in ASTM D1051 for the extra small size.

Balmoral Engineering Pty Ltd | ABN 37 001 826 017 | A: 1/38 Leighton Pl, Hornsby NSW 2077 Australia | T: + 61 2 9482 4000 | E: info@balmoralengineering.com |

Compiled/Updated	LL
Approved	CD
Issued Date	22-7-26
Amendment	A4

Material Table (C)

Material	Natural Rubber	
Colour	Red and Yellow	
Standard	ASTM D1051-2019	
Style	Extra curved	
Class	4	
Max Use	36000v	

*Disclaimer: BALMORAL ENGINEERING, ROTAMARKA, TIGER TAILS and BIRDFLAPPA are trademarks owned by Balmoral Engineering Pty Ltd. The information in this document or product specification is believed to be correct as of the date of issue and is subject to change without notice. This document should be read in conjunction with the applicable Instructions For Use (IFU) document. Data within Balmoral Engineering Product Data Sheet (PDS) may be subject to tolerances. These tolerances will be defined within the applicable PDS or made available on request. Results and output data in this data sheet are indicative of lab testing protocols and may vary in field applications or environments. BALMORAL ENGINEERING makes no guarantees, expressed or implied as to the merchantability or fitness for purpose. The products are only to be used and installed by industry certified personnel. If applicable, maximum test speeds should be endured by the Products for a limited time period no greater than those described in the lab protocols. Imperial system units of measure are approximations only and have been converted from the data originally recorded in the metric system. Performance of the device in extreme weather events or harsh environments is not warranted. If BALMORAL ENGINEERING sells any component of a product or kit, we make no representations or guarantees as to the serviceability of the actual product or kit into which the component is being added. Furthermore, it is recommended that any such addition to the kit is done by BALMORAL ENGINEERING. In relation to the Balmoral Engineering Visual Warning series of products, it should be noted that not all visual responses to the device are going to be similar or alike. As such, no guarantees can be given as to the products effectiveness. Given the variety of factors that can affect the use and application of a product, some of which are within the user's knowledge and control, it is essential that the user evaluate the product to determine whether it is fit for a particular purpose and suitable for the user's method of use or application. The purpose of this document is to provide a description of the product and/or guidance to the installation thereof. When installing Balmoral Engineering products, due consideration must be given to the user's training and practice methodologies including any requirements of the entity who owns the infrastructure onto which the BALMORAL ENGINEERING Product is being installed. This must take precedence over any guidance BALMORAL ENGINEERING may provide. Notwithstanding, that all the above guidelines are followed, the ultimate responsibility for installing and maintaining the product correctly is with the end user. BALMORAL ENGINEERING accepts no liability for consequential damage relating to wildfires or bushfires particularly in regard to incorrect installation. As service environments may differ markedly with each application, the level of care required may change and is solely the responsibility of the end user. Any product images displayed are representative only. The above data sheet is provided as an estimate of performance and life and is not a guarantee or warranty. © **2026**, All Rights Reserved, Balmoral Engineering Pty Ltd.*

Balmoral Engineering Pty Ltd | ABN 37 001 826 017 | A: 1/38 Leighton Pl, Hornsby NSW 2077 Australia | T: + 61 2 9482 4000 | E: info@balmoralengineering.com |