
# AERIAL SERVICE CABLE TERMINATION FITTINGS BOLTED TYPE



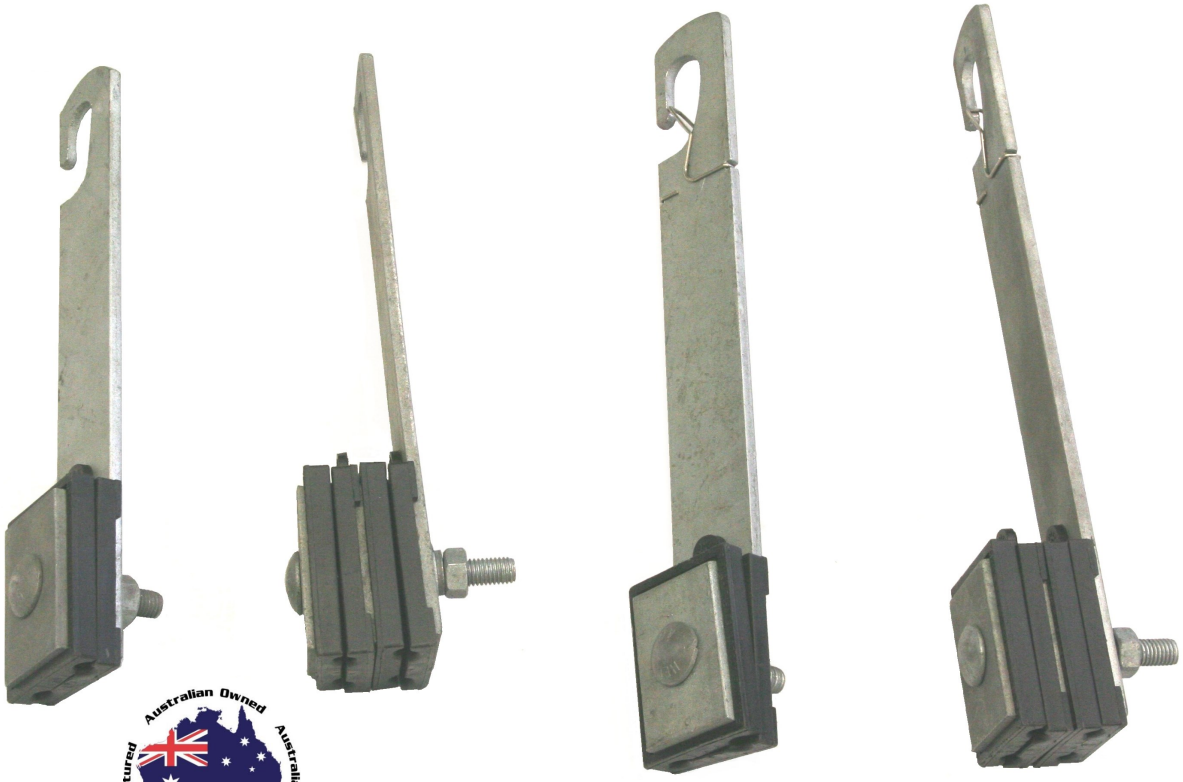


- Two fittings suit 10 & 16mm² Copper and 25 & 35mm² Aluminium cable and also converts from strain to a suspension clamp.
- Open Hook or optional Closed Eye for ease of attachment.
- Convenient bolted clamping action including Spring Loaded Pressure Pads for ease of assembly, disassembly and long term stability.
- Cable clamping pads specifically designed to protect cable insulation from damage.
- Manufactured from UV Resistant premium grade Glass Filled Polymer and Hot Dip Corrosion resistant galvanised steel.
- High Voltage test withstand tested (15kV for 3 secs) for attachment to high voltage steel or concrete poles.

| Part No | Cable Range Terminated 2 Core (mm²) | Cable Range Terminated 3 Core (mm²) | Cable Range Terminated 4 Core (mm²) | Pack Qty |
|---|---|---|---|---|
| **ECV1054** | 10 to 35 | N/A | N/A | 20 |
| **ECV1055** | 10 to 35 | 10 to 35 | 10 to 35 | 20 |
| **E1054/E** | 10 to 35 | N/A | N/A | 20 |
| **E1055/E** | 10 to 35 | 10 to 35 | 10 to 35 | 20 |
| **E1054/J** | 10 to 35 | N/A | N/A | 20 |
| **E1055/J** | 10 to 35 | 10 to 35 | 10 to 35 | 20 |

# AERIAL SERVICE CABLE TERMINATION FITTINGS WEDGE TYPE



- Suitable for two, three or four core XLPE Insulated Cables complying to the requirements of AS3560.
- Fully tested to suit 6 to 35mm² Copper or Aluminium Cables
- Manufactured using UV resistant glass filled polymer.
- The clamp is supplied standard with a stainless steel bail.
- Bails can be manufactured to suit the customers individual requirements.

| Part No | Cable Range Terminated 2 Core (mm²) | Cable Range Terminated 3 Core (mm²) | Cable Range Terminated 4 Core (mm²) | Pack Qty |
|---|---|---|---|---|
| **E1058** | 6 to 35 | 6 to 35 | 6 to 35 | 50 |
| **E1058/1** | 10 to 35 | 10 to 35 | 10 to 35 | 50 |