MONOi

HEAT-SHRINKABLE MV INDOOR TERMINATIONS FOR SINGLE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN, WITH OR WITHOUT ARMOUR
Up to 19/33 (36) kV

Application
The ''MONOi'' terminations are a single component solution, for single core polymeric cables with or without armour.


Technical description
The ''MONOi'' indoor terminations are designed for maximum system voltages of 36kV, for compact switchgear as well as for installations where space is limited.


Easy and quick to install, reducing installation time and errors.
The kit consists of a stress control mastic strip, a co-extruded dual wall tube and red anti tracking sealing mastic.
Add on kit for armoured cables are available separately.





Type tested acc.:
Cenelec HD 629.1 S2
IEC 60502-4

Um kV	Type	Application range (mm^2)	L (mm)
12	12MONOi1.95	35÷95	290
12	12MONOi1.240	70÷240	290
12	12MONOi1.400	185÷400	320
12	12MONOi1.630	400÷630	350
24	24MONOi1.95	35÷95	350
24	24MONOi1.240	70÷240	350
24	24MONOi1.400	185÷400	370
24	24MONOi1.630	400÷630	400
36	36MONOi1.95	35÷95	440
36	36MONOi1.240	70÷240	440
36	36MONOi1.400	185÷400	470
36	36MONOi1.630	400÷630	490

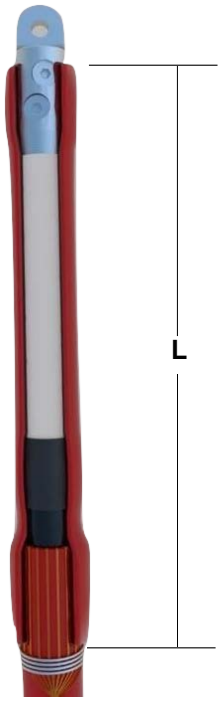



For cables with lead screen please contact our sales office



Please add "MI" at the end of the product code for cables with Cu tape screen


Earth kit included for cables with wire screens


For other cable types please contact our sales office


Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page


Various earth connection solutions exist for armoring. For exact details please contact our sales office


Design accommodates various lug types


Various earth connection kits are available for screen connection. For exact details please contact our sales office

MONOe

HEAT-SHRINKABLE MV OUTDOOR TERMINATIONS FOR SINGLE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN, WITH OR WITHOUT ARMOUR
Up to 19/33 (36) kV

Application

The ''MONOe'' terminations are a single component solution, for single core polymeric cables with or without armour.

Technical description


The ''MONOe'' outdoor terminations are designed for maximum system voltages of 36kV.

Easy and quick to install, reducing installation time and errors.
The kit consists of a stress control mastic strip, a co-extruded dual wall tube, red anti tracking sealing mastic and anti tracking rain sheds.
Add on kit for armoured cables are available separately.




Type tested acc.:
Cenelec HD 629.1 S2
IEC 60502-4

Um kV	Type	Application range (mm^2)	L (mm)
12	12MONOe1.95	35÷95	420
12	12MONOe1.240	70÷240	420
12	12MONOe1.400	185÷400	440
12	12MONOe1.630	400÷630	470
24	24MONOe1.95	35÷95	440
24	24MONOe1.240	70÷240	440
24	24MONOe1.400	185÷400	470
24	24MONOe1.630	400÷630	490
36	36MONOe1.95	35÷95	500
36	36MONOe1.240	70÷240	490
36	36MONOe1.400	185÷400	530
36	36MONOe1.630	400÷630	540

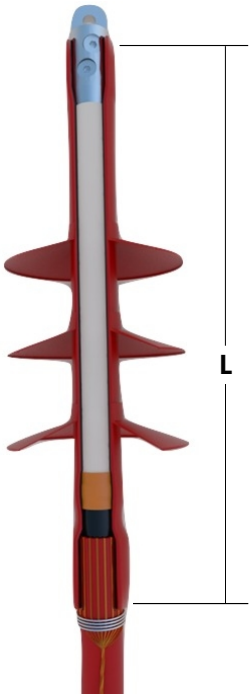





Designed for outdoor applications



For cables with lead screen please contact our sales office



Please add "MT" at the end of the product code for cables with Cu tape screen




Earth kit included for cables with wire screens




For other cable types please contact our sales office



Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page



Various earth connection solutions exist for armoring. For exact details please contact our sales office



Design accommodates various lug types



Various earth connection kits are available for screen connection. For exact details please contact our sales office

Nexans Australmold - Building 2, 69 Dalton Road Thomastown VIC 3074
PH: +61 3 9205 8400
WEB: www.australmold.com.au - E: sales@australmold.com.au