Mechanical Connectors

LVM Series - LV Bolted Branch Connectors

Application


General purpose low voltage branch, service or straight connections.

Conductor Type

A wide range of conductor types including solid or stranded, circular or sector shaped, copper or aluminium, in any combination.


Features


- Includes dip moulded plastic shrouds
- Stainless steel fasteners
- Ideal alternative to “C” crimps

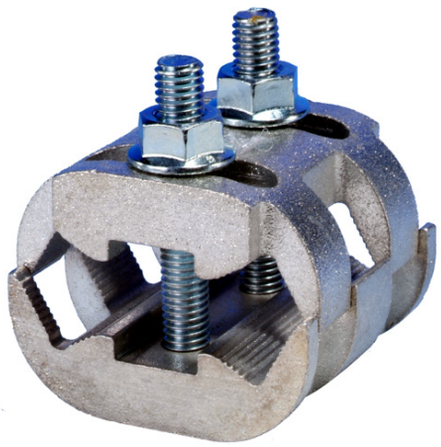







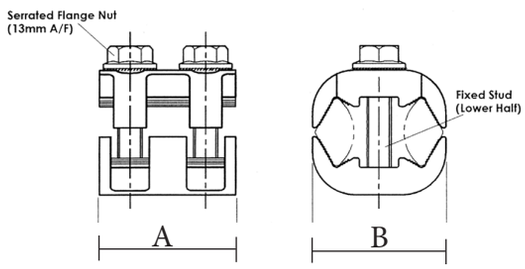

Product Number	Conductor* Size Range (mm)²	Overall Length (A) (mm)	Width (B) (mm)	Minimum Tightening Torque (Nm)
LVM1+SHROUD	16 - 95	45	34	14
LVM2+SHROUD	16 -185	45	44	18
LVM3+SHROUD	16 - 300	50	54	18

**Suitable for class 1 & 2 copper and aluminium conductors (AS1125) only. Not suitable for flexible cables.*

© Sicame Australia Pty Ltd. The information presented here is subject to change without notice.