Portable Earthing Device Quotation

Please enter responses or circle as required


SICAME AUSTRALIA
ENERGY IS OUR BUSINESS

Network Properties

Maximum Fault Current (KA) | 10KA | 16KA | 25KA | 33KA | 45KA | for 0.5 seconds


Maximum Voltage (KV) ☐
For stick length purposes

PED Assembly Type

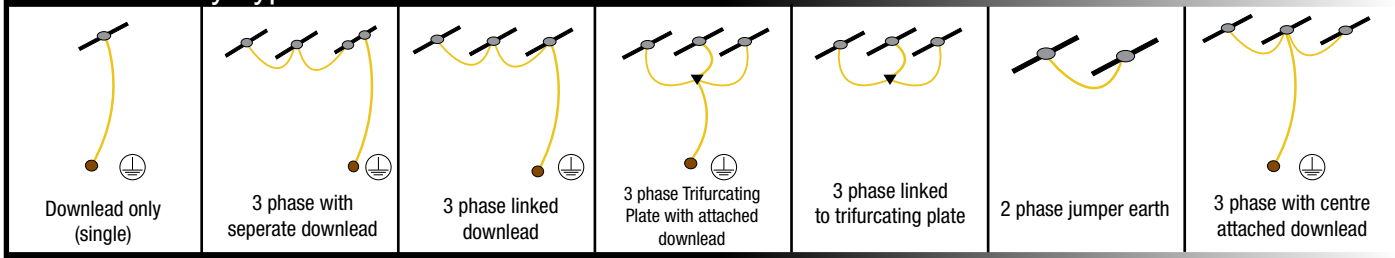

Downlead only (single)	3 phase with seperate downlead	3 phase linked downlead	3 phase Trifurcating Plate with attached downlead	3 phase linked to trifurcating plate	2 phase jumper earth	3 phase with centre attached downlead

Cable Length Required (Enter Value)



Length of Cable (m)

1. Phase to phase	2. Phase to Phase Length	3. Phase to ground length

Please Note: A slightly longer cable length than what is required is recommended to allow the earth clamp to be easily secured. It is however advised not to add too much as this can create a hazard during a fault as the cable can flick out with force capable of casuing serious injury.

Phase/Conductor Clamps to suit (Enter Value)

Circular ◯ | Min OD ☐ | Max OD ☐

Flat Busbar ▮ | Min OD ☐ | Max OD ☐

Fixed Point OD of ball (mm) | 20 | 25 | Other_____

Phase/Conductor Clamp Fitting

Snap on | Shotgun Screw up | Bayonet Screw up | Rubber Handle | Fixed stick* | Tee Handle

Note: See reference chart for further assistance

*Fixed Stick Length (m) : _____

Downlead Earth Tail Clamp

Circular ◯ | Min OD ☐ | Max OD ☐

Flat Busbar ▮ | Min OD ☐ | Max OD ☐

Fixed Point OD of ball (mm) | 20 | 25 | Other_____

Downlead/Earth Tail Clamp Fitting (Circle)

Tee Handle | Rubber Handle | Bayonet Screw up | Shotgun Screw up | Fixed stick* | Snap on

Note: See reference chart for further assistance

*Fixed Stick Length (m) : _____

Contact details

Name: _____ Company Name: _____

Address: _____

Phone: _____ Mobile: _____

Email: _____

Please Return to relevant Sicame Sales Representative or to esales@sicame.com.au

Carry Bag



Is a carry bag required?

YES | NO

Are you happy for Sicame to recommend a suitable bag

YES | NO

Reference Chart

Portable Earthing Components

SICAME AUSTRALIA

ENERGY IS OUR BUSINESS

CATU™

Phase Clamps

Please Note: Other clamps available



Rated to ***25KA*** *0.5 seconds*

Suitable for
- Circular
- 3mm to 33mm
-Snap-on

MT-613/3



Rated to ***45KA*** *0.5 seconds*

Suitable for
- Circular & Flat
- 5mm to 40mm

MT-815-E



Rated to ***45KA*** *0.5 seconds*

Suitable for
- Circular & Flat
- 5mm to 40mm

MT-815-C



Rated to ***45KA*** *0.5 seconds*

Suitable for
- Circular & Flat
- 5mm to 40mm

MT-815-S



Rated to ***10KA*** *0.5 seconds*

Suitable for
- Circular
- 10mm to 30mm

MT-612



Rated to ***45KA*** *0.5 seconds*

Suitable for
- Circular
- 16mm to 85mm

MT-736-085



Rated to ***45KA*** *0.5 seconds*

Suitable for
- Circular & Ball
- 10mm to 25mm

MT-1921-E



Rated to ***45KA*** *0.5 seconds*

Suitable for
- Circular
- 12mm to 48mm

MT-701

Earth Clamps

Please Note: Other clamps available



Rated to ***16KA*** *0.5 seconds*

Suitable for
- Circular & Flat
- 0mm to 25mm

MT-840/1



Rated to ***30KA*** *0.5 seconds*

Suitable for
- Circular & Flat
- 0mm to 35mm

MT-843



Rated to ***25KA*** *0.5 seconds*

Suitable for
- Flat
- 0mm to 13mm

MT-847




Rated to ***25KA*** *0.5 seconds*

Suitable for
- Circular & Flat
- 0mm to 25mm
- Lockable

MT-870


Carry Bag





BAG PVC ARB/500
Range





BAG PVC ARB/600
Range

Fixed Points



MT-3951-1



MT-3951



MT-3950/35

Brass Stubs



	Rating KA (0.5 sec)	Bolt Size	Stub OD (mm)	Stub Length (mm)
M12/22 BRS STUB	25	M12	25	60
M12/25 BRS STUB	25	M12	25	60
M16/22 BRS STUB	45	M16	22	60
M16/25 BRS STUB	45	M16	25	60

Accessories



Clamp removal adaptor (hex)

CRA-C



Clamp removal adaptor (sunrise)

CRA-K



Application Platform (Sunrise)

MT-630-K



Application Platform (Hex)

MT-630-C