

SINGLE EYE CAP

TABLE C1

Galvanised Strand
Alloy Ferrule

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C1006	6-12	350	5
C1010	10-14	350	5
C1014	14-19	400	9
C1019	19-28	500	15
C1028	28-40	600	24
C1040	40-55	800	35
C1055	55-75	900	62
C1075	75-95	1000	98
C1095	95-120	1200	133
C1120	120-150	1400	187
C1150	150-190	1600	283



TABLE C2

Galvanised Strand
Alloy Ferrule
Galvanised Thimble

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C2006	6-12	350	5
C2010	10-14	350	5
C2014	14-19	400	9
C2019	19-28	500	15
C2028	28-40	600	24
C2040	40-55	800	35
C2055	55-75	900	62
C2075	75-95	1000	98
C2095	95-120	1200	133
C2120	120-150	1400	187
C2150	150-190	1600	283



TABLE C3

Galvanised Strand
Copper Ferrule

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C3006	6-12	350	5
C3010	10-14	350	5
C3014	14-19	400	9
C3019	19-28	500	15
C3028	28-40	600	24
C3040	40-55	800	35
C3055	55-75	900	62
C3075	75-95	1000	98
C3095	95-120	1200	133
C3120	120-150	1400	187
C3150	150-190	1600	283



TABLE C4

Galvanised Strand
Copper Ferrule
Galvanised Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C4006	6-12	350	5
C4010	10-14	350	5
C4014	14-19	400	9
C4019	19-28	500	15
C4028	28-40	600	24
C4040	40-55	800	35
C4055	55-75	900	62
C4075	75-95	1000	98
C4095	95-120	1200	133
C4120	120-150	1400	187
C4150	150-190	1600	283

TABLE C5

Stainless Steel Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C5006	6-12	350	4
C5010	10-14	350	4
C5014	14-19	400	7
C5019	19-28	500	12
C5028	28-40	600	19
C5040	40-55	800	27
C5055	55-75	900	48
C5075	75-95	1000	79
C5095	95-120	1200	105
C5120	120-150	1400	147
C5150	150-190	1600	225

TABLE C6

Stainless Steel Strand
Copper Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C6006	6-12	350	4
C6010	10-14	350	4
C6014	14-19	400	7
C6019	19-28	500	12
C6028	28-40	600	19
C6040	40-55	800	27
C6055	55-75	900	48
C6075	75-95	1000	79
C6095	95-120	1200	105
C6120	120-150	1400	147
C6150	150-190	1600	225

TABLE C7

Stainless Steel Strand
Stainless Steel Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C7006	6-12	350	4
C7010	10-14	350	4
C7014	14-19	400	7
C7019	19-28	500	12
C7028	28-40	600	19
C7040	40-55	800	27
C7055	55-75	900	48
C7075	75-95	1000	79
C7095	95-120	1200	105
C7120	120-150	1400	147
C7150	150-190	1600	225

OFFSET EYE

TABLE O1

Galvanised Strand
Alloy Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O1006	6-12	350	5
O1010	10-14	350	5
O1014	14-19	400	9
O1019	19-28	500	15
O1028	28-40	600	24
11040	40-55	800	35
11055	55-75	900	62
11075	75-95	1000	98
11095	95-120	1200	133
11120	120-150	1400	187
11150	150-190	1600	283

TABLE O2

Galvanised Strand
Alloy Ferrule
Galvanised Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O2006	6-12	350	5
O2010	10-14	350	5
O2014	14-19	400	9
O2019	19-28	500	15
O2028	28-40	600	24
O2040	40-55	800	35
12055	55-75	900	62
12075	75-95	1000	98
12095	95-120	1200	133
12120	120-150	1400	187
12150	150-190	1600	283

TABLE O3

Galvanised Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O3006	6-12	350	5
O3010	10-14	350	5
O3014	14-19	400	9
O3019	19-28	500	15
13028	28-40	600	24
13040	40-55	800	35
13055	55-75	900	62
13075	75-95	1000	98
13095	95-120	1200	133
13120	120-150	1400	187
O3150	150-190	1600	283

TABLE O4

Galvanised Strand
Copper Ferrule
Galvanised Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O4006	6-12	350	5
O4010	10-14	350	5
O4014	14-19	400	9
O4019	19-28	500	15
O4028	28-40	600	24
O4040	40-55	800	35
O4055	55-75	900	62
O4075	75-95	1000	98
O4095	95-120	1200	133
O4120	120-150	1400	187
O4150	150-190	1600	283

TABLE O5

Stainless Steel Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O5006	6-12	350	4
O5010	10-14	350	4
O5014	14-19	400	7
O5019	19-28	500	12
O5028	28-40	600	19
O5040	40-55	800	27
O5055	55-75	900	48
O5075	75-95	1000	79
O5095	95-120	1200	105
O5120	120-150	1400	147
O5150	150-190	1600	225

TABLE O6

Stainless Steel Strand
Copper Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O6006	6-12	350	4
O6010	10-14	350	4
O6014	14-19	400	7
O6019	19-28	500	12
O6028	28-40	600	19
O6040	40-55	800	27
O6055	55-75	900	48
O6075	75-95	1000	79
O6095	95-120	1200	105
O6120	120-150	1400	147
O6150	150-190	1600	225

TABLE O7

Stainless Steel Strand
Stainless Steel Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
O7006	6-12	350	4
O7010	10-14	350	4
O7014	14-19	400	7
O7019	19-28	500	12
O7028	28-40	600	19
O7040	40-55	800	27
O7055	55-75	900	48
O7075	75-95	1000	79
O7095	95-120	1200	105
O7120	120-150	1400	147
O7150	150-190	1600	225

DOUBLE EYE

TABLE D1

Galvanised Strand
Alloy Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D1006	6-12	350	5
D1010	10-14	350	5
D1014	14-19	400	9
D1019	19-28	500	15
D1028	28-40	600	24
D1040	40-55	800	35
D1055	55-75	900	62
D1075	75-95	1000	98
D1095	95-120	1200	133
D1120	120-150	1400	187
D1150	150-190	1600	283

TABLE D2

Galvanised Strand
Alloy Ferrule
Galvanised Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D2006	6-12	350	5
D2010	10-14	350	5
D2014	14-19	400	9
D2019	19-28	500	15
D2028	28-40	600	24
D2040	40-55	800	35
D2055	55-75	900	62
D2075	75-95	1000	98
D2095	95-120	1200	133
D2120	120-150	1400	187
D2150	150-190	1600	283

TABLE D3

Galvanised Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D3006	6-12	350	5
D3010	10-14	350	5
D3014	14-19	400	9
D3019	19-28	500	15
D3028	28-40	600	24
D3040	40-55	800	35
D3055	55-75	900	62
D3075	75-95	1000	98
D3095	95-120	1200	133
D3120	120-150	1400	187
D3150	150-190	1600	283

TABLE D4

Galvanised Strand
Copper Ferrule
Galvanised Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D4006	6-12	350	5
D4010	10-14	350	5
D4014	14-19	400	9
D4019	19-28	500	15
D4028	28-40	600	24
D4040	40-55	800	35
D4055	55-75	900	62
D4075	75-95	1000	98
D4095	95-120	1200	133
D4120	120-150	1400	187
D4150	150-190	1600	283

TABLE D5

Stainless Steel Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D5006	6-12	350	4
D5010	10-14	350	4
D5014	14-19	400	7
D5019	19-28	500	12
D5028	28-40	600	19
D5040	40-55	800	27
D5055	55-75	900	48
D5075	75-95	1000	79
D5095	95-120	1200	105
D5120	120-150	1400	147
D5150	150-190	1600	225

TABLE D6

Stainless Steel Strand
Copper Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D6006	6-12	350	4
D6010	10-14	350	4
D6014	14-19	400	7
D6019	19-28	500	12
D6028	28-40	600	19
D6040	40-55	800	27
D6055	55-75	900	48
D6075	75-95	1000	79
D6095	95-120	1200	105
D6120	120-150	1400	147
D6150	150-190	1600	225

TABLE D7

Stainless Steel Strand
Stainless Steel Ferrule
Stainless Steel Thimble




Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
D7006	6-12	350	4
D7010	10-14	350	4
D7014	14-19	400	7
D7019	19-28	500	12
D7028	28-40	600	19
D7040	40-55	800	27
D7055	55-75	900	48
D7075	75-95	1000	79
D7095	95-120	1200	105
D7120	120-150	1400	147
D7150	150-190	1600	225

LACE-UP OFFSET EYE

TABLE S1


Galvanised Strand
Alloy Ferrule

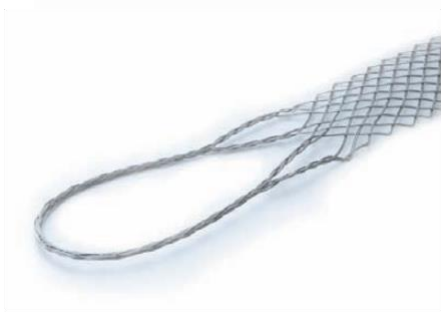

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S1014	14-19	500	9
S1019	19-28	600	15
S1028	28-40	800	24
S1040	40-55	900	35
S1055	55-75	1000	62
S1075	75-95	1200	98
S1095	95-120	1400	98
S1120	120-150	1600	141
S1150	150-190	1800	141

TABLE S2


Galvanised Strand
Alloy Ferrule
Galvanised Thimble

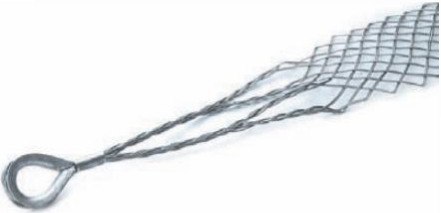

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S2014	14-19	500	9
S2019	19-28	600	15
S2028	28-40	800	24
S2040	40-55	900	35
S2055	55-75	1000	62
S2075	75-95	1200	98
S2095	95-120	1400	98
S2120	120-150	1600	141
S2150	150-190	1800	141

TABLE S3

Galvanised Strand
Copper Ferrule

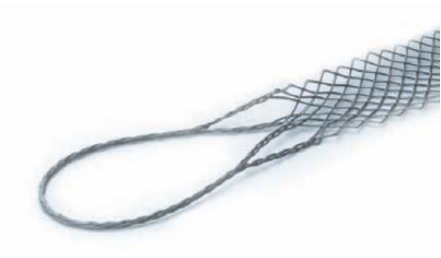

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S3014	14-19	500	9
S3019	19-28	600	15
S3028	28-40	800	24
S3040	40-55	900	35
S3055	55-75	1000	62
S3075	75-95	1200	98
S3095	95-120	1400	98
S3120	120-150	1600	141
S3150	150-190	1800	141

TABLE S4


Galvanised Strand
Copper Ferrule
Galvanised Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S4014	14-19	500	9
S4019	19-28	600	15
S4028	28-40	800	24
S4040	40-55	900	35
S4055	55-75	1000	62
S4075	75-95	1200	98
S4095	95-120	1400	98
S4120	120-150	1600	141
S4150	150-190	1800	141

TABLE S5

Stainless Steel Strand
Copper Ferrule

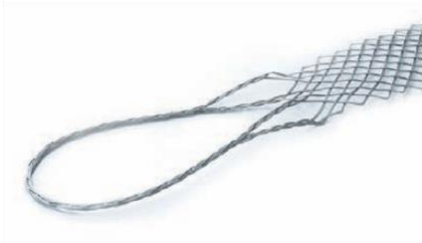

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S5014	14-19	500	7
S5019	19-28	600	12
S5028	28-40	800	19
S5040	40-55	900	27
S5055	55-75	1000	48
S5075	75-95	1200	79
S5095	95-120	1400	79
S5120	120-150	1600	112
S5150	150-190	1800	112

TABLE S6

Stainless Steel Strand
Copper Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S6014	14-19	500	7
S6019	19-28	600	12
S6028	28-40	800	19
S6040	40-55	900	27
S6055	55-75	1000	48
S6075	75-95	1200	79
S6095	95-120	1400	79
S6120	120-150	1600	112
S6150	150-190	1800	112

TABLE S7

Stainless Steel Strand
Stainless Steel Ferrule
Stainless Steel Thimble




Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
S7014	14-19	500	7
S7019	19-28	600	12
S7028	28-40	800	19
S7040	40-55	900	27
S7055	55-75	1000	48
S7075	75-95	1200	79
S7095	95-120	1400	79
S7120	120-150	1600	112
S7150	150-190	1800	112

LACE-UP DOUBLE EYE

TABLE SA


Galvanised Strand
Alloy Ferrule

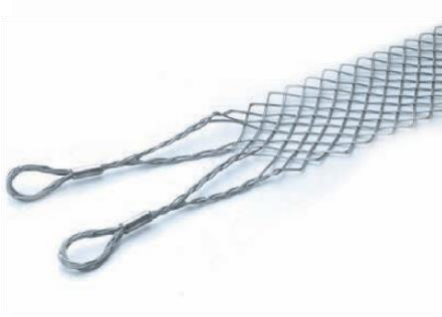

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SA014	14-19	500	9
SA019	19-28	600	15
SA028	28-40	800	24
SA040	40-55	900	35
SA055	55-75	1000	62
SA075	75-95	1200	98
SA095	95-120	1400	133
SA120	120-150	1600	187
SA150	150-190	1800	283

TABLE SB

Galvanised Strand
Alloy Ferrule
Galvanised Thimble

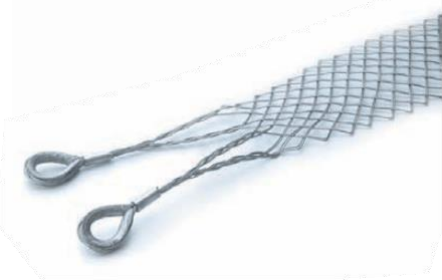

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SB014	14-19	500	9
SB019	19-28	600	15
SB028	28-40	800	24
SB040	40-55	900	35
SB055	55-75	1000	62
SB075	75-95	1200	98
SB095	95-120	1400	133
SB120	120-150	1600	187
SB150	150-190	1800	283

TABLE SC


Galvanised Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SC014	14-19	500	9
SC019	19-28	600	15
SC028	28-40	800	24
SC040	40-55	900	35
SC055	55-75	1000	62
SC075	75-95	1200	98
SC095	95-120	1400	133
SC120	120-150	1600	187
SC150	150-190	1800	283

TABLE SD

Galvanised Strand
Copper Ferrule
Galvanised Thimble

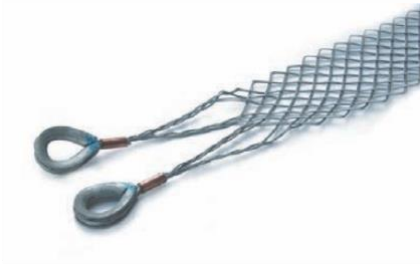

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SD014	14-19	500	9
SD019	19-28	600	15
SD028	28-40	800	24
SD040	40-55	900	35
SD055	55-75	1000	62
SD075	75-95	1200	98
SD095	95-120	1400	133
SD120	120-150	1600	187
SD150	150-190	1800	283

TABLE SE

Stainless Steel Strand
Copper Ferrule



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SE014	14-19	500	7
SE019	19-28	600	12
SE028	28-40	800	19
SE040	40-55	900	27
SE055	55-75	1000	48
SE075	75-95	1200	79
SE095	95-120	1400	79
SE120	120-150	1600	112
SE150	150-190	1800	112

TABLE SF


Stainless Steel Strand
Copper Ferrule
Stainless Steel Thimble



Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SF014	14-19	500	7
SF019	19-28	600	12
SF028	28-40	800	19
SF040	40-55	900	27
SF055	55-75	1000	48
SF075	75-95	1200	79
SF095	95-120	1400	79
SF120	120-150	1600	112
SF150	150-190	1800	112

TABLE SG

Stainless Steel Strand
Stainless Steel Ferrule
Stainless Steel Thimble

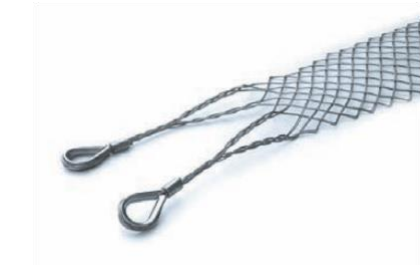

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
SG014	14-19	500	7
SG019	19-28	600	12
SG028	28-40	800	19
SG040	40-55	900	27
SG055	55-75	1000	48
SG075	75-95	1200	79
SG095	95-120	1400	79
SG120	120-150	1600	112
SG150	150-190	1800	112

NON-CONDUCTIVE LOW VOLTAGE

TABLE LV

Nylon Strand
Alloy Ferrule
Soft Eye

Product Code	Suits Low voltage ABC sizes	Size range (mm)	N° of ply	Grip length (mm)	Ultimate Tensile Strength (kN)
LV225	2x25 mm2 LV	14-19	2	600	15
LV235	2x35 mm2 LV	14-19	2	600	15
LV335	3x35 mm2 LV	14-19	2	600	15
LV250	2x50 mm2 LV	19-28	2	600	15
LV295	2x95 mm2 LV	20-30	2	600	15
LV425	4x25 mm2 LV	20-40	2	600	15
LV435	4x35 mm2 LV	19-28	2	600	15
LV450	4x50 mm2 LV	20-30	2	600	15
LV470	4x70 mm2 LV	19-28	2	600	17
LV395	3x35 mm2 LV	20-40	3	600	25
LV495	4x95 mm2 LV	20-40	3	800	25
LV4150	4x150 mm2 LV	30-50	3	800	25



NON-CONDUCTIVE HIGH VOLTAGE

TABLE HV

Nylon Strand
Alloy Ferrule
Soft Eye

Product Code	Suits Low voltage ABC sizes	Size range (mm)	N° of ply	Grip length (mm)	Ultimate Tensile Strength (kN)
HV335	3x35 mm2 LV LV	40-55	3	800	25
HV350	3x50 mm2 LV	40-55	3	800	25
HV370	3x70 mm2 LV	40-55	3	800	25
HV395	3x95 mm2 LV	50-65	4	900	31
HV3120	3x120 mm2 LV	50-65	4	900	31
HV3150	3x150 mm2 LV	55-75	4	900	31



NON-CONDUCTIVE KEVLAR SINGLE EYE CAP

TABLE C8

Kevlar Strand
Plastic Sheath
Covered Eye

Product Code	Size Range (mm)	Grip length (mm)	Ultimate Tensile Strength (kN)
C8006	6-11	350	12
C8010	10-14	350	12
C8014	14-19	400	12
C8019	19-28	500	18
C8028	28-40	600	30
C8040	40-55	800	36
C8055	55-75	900	53
C8075	75-95	1000	70
C8095	95-210	1200	105



HEAVY DUTY GRADED WEAVES

TABLE HDGW

Multi Ply
Galvanised Strand
Alloy Ferrule
Soft Eye



Product Code	Size Range/Style	Ultimate Tensile Strength (kN)
HDGW08CS	8-11 Single Eye	28
HDGW10CS	10-15 Single Eye	37
HDGW15CS	15-21 Single Eye	57
HDGW20CS	20-29 Single Eye	73
HDGW27CS	27-35 Single Eye	8
HDGW32CS	32-37 Single Eye	

Available without Copper Shoulder on

LIGHT DUTY

TABLE LD

Single Ply
Galvanised Strand



Product Code	Size Range/Style	Ultimate Tensile Strength (kN)
LD06	6-9 Single Eye Cap	2.9
LD09	9-12 Single Eye	3.5
LD12	12-16 Single Eye	6.5
LD16	16-20 Single Eye	6.5
LD20	20-25 Single Eye	12
LD25	25-32 Single Eye	12

HEAVY DUTY

TABLE CHD

Multi Ply
Galvanised Strand
Alloy Ferrule
Soft or Thimble Eye



Product Code	Size Range/Style	Ultimate Tensile Strength (kN)
CHD1004	4-7 Single Eye Cap	5
CHD1006	6-11 Single Eye	8
CHD1010	10-14 Single Eye	15
CHD1014	14-19 Single Eye	20
CHD1019	19-28 Single Eye	37
CHD1028	28-40 Single Eye	44
CHD1040	40-55 Single Eye	62
CHD1055	55-75 Single Eye	80
CHD1075	75-95 Single Eye	180

OPEN BOTH ENDS

TABLE OBE

Two Ply
Galvanised Strand



Product Code	Size Range/Style	Ultimate Tensile Strength (kN)
OBE010	10-14 Open Both	1.7
OBE014	14-19 Open Both	3
OBE019	19-28 Open Both	5
OBE028	28-40 Open Both	8
OBE040	40-55 Open Both	
OBE055	55-75 Open Both	

OPEN BOTH ENDS - STAINLESS STEEL

TABLE OBESS

Two Ply
Stainless Steel Strand



Product Code	Size Range/Style	Ultimate Tensile Strength (kN)
OBE010SS	10-14 Open Both	1.7
OBE014SS	14-19 Open Both	3
OBE019SS	19-28 Open Both	5
OBE028SS	28-40 Open Both	8

CUSTOM GRIPS

Available on request

